



2F21

MONOSCOPE

5-INCH MAGNETIC-DEFLECTION TYPE

Supersedes Type 1899

2F21

General:

Heater, for Unipotential Cathode:

Voltage. $6.3 \pm 10\%$ ac or dc volts

Current. 0.6 amp

Direct Interelectrode Capacitances:

Grid No.1 to All Other Electrodes. 7 μuf Pattern Electrode to Grid No.4 5 μuf

Pattern:

Type See illustration on next page

Dimensions (Approx.) 2-5/16" x 3-1/16"

Calibration. Up to 500 lines

Focusing Method. Electrostatic

Deflection Method Magnetic

Maximum Solid Deflection Angle 40°

Overall Length 12-7/16" + 1/4" - 7/16"

Greatest Diameter of Bulb. 5-1/16" max.

Caps (Two) Recessed Small Ball

Mounting Position. Any

Base Long-Shell Medium 6-Pin

Basing Designation for BOTTOM VIEW 6BV


Pin 1-Heater Pin 6 -Heater

Pin 2-Grid No.2 End Cap - Pattern

Pin 3-Grid No.3 Electrode

Pin 4-Grid No.1 Side Cap - Grid No.4

Pin 5-Cathode



Maximum Ratings, Design-Center Values:

PATTERN-ELECTRODE VOLTAGE. 1500 max. volts

GRID-No.4 (COLLECTOR) VOLTAGE. 1500 max. volts

GRID-No.3 (FOCUSING ELECTRODE) VOLTAGE 600 max. volts

GRID-No.2 (ACCELERATING ELECTRODE) VOLT. 1600 max. volts

GRID-No.1 (CONTROL ELECTRODE) VOLTAGE:

Negative Bias Value. 125 max. volts

Positive Bias Value. 0 max. volts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode 125 max. volts

Heater positive with respect to cathode 125 max. volts

Typical Operation: ♦

Pattern-Electrode Voltage. 1000 volts

Grid-No.4 Voltage. 1050 volts

Grid-No.3 Voltage for Focus at
 0.5 μ amp Grid-No.4 Current* 300 approx. volts

Grid-No.2 Voltage. 1000 volts

Grid-No.1 Voltage for
 Visual Cutoff on Monitor# -50 approx. voltsInternal Resistance between
 Grid No.4 and Pattern Electrode Greater than 1 meg.Grid-No.4 Current. 0.5 μ amp

♦,▲,*:—See next page.

JUNE 20, 1946

TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA

2F21




2F21

MONOSCOPE

Pattern-Electrode Signal Current (Peak-to-Peak)	0.5 approx. μ amp
Resolution Capability**	500 . . . lines
Maximum Circuit Value:	
Grid-No.1-Circuit Resistance	1.5 max. megohms

- Individual tubes may require between + 20% and - 20% of these values.
- † Deflection must be maintained at all times. When scanned area does not cover entire pattern, the beam current should be reduced accordingly and time of operation limited to prevent damaging the pattern.
- # Supply should be adjustable between + 40% and - 80% of this value.
- ▲ with full scanning.

PATTERN

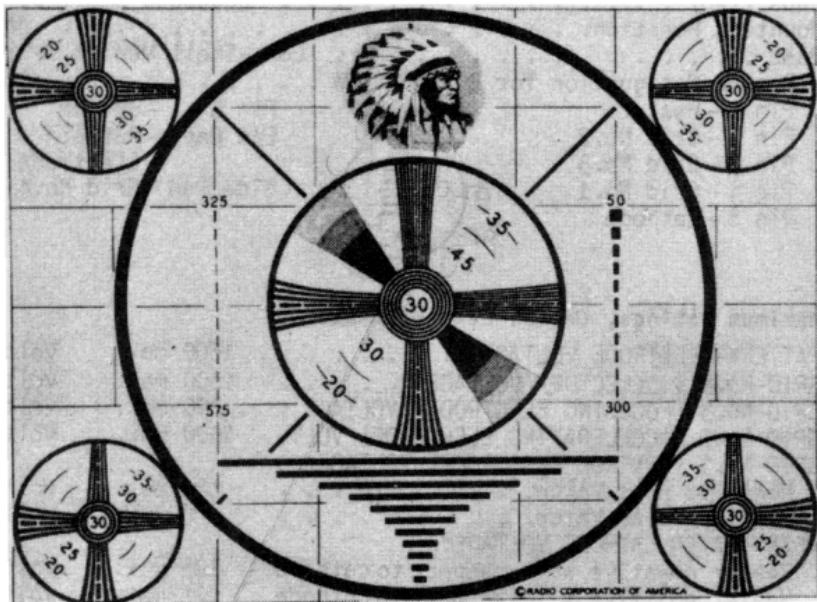


92CS-6665

JUN 20, 1946

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA

2F21 MONOSCOPE

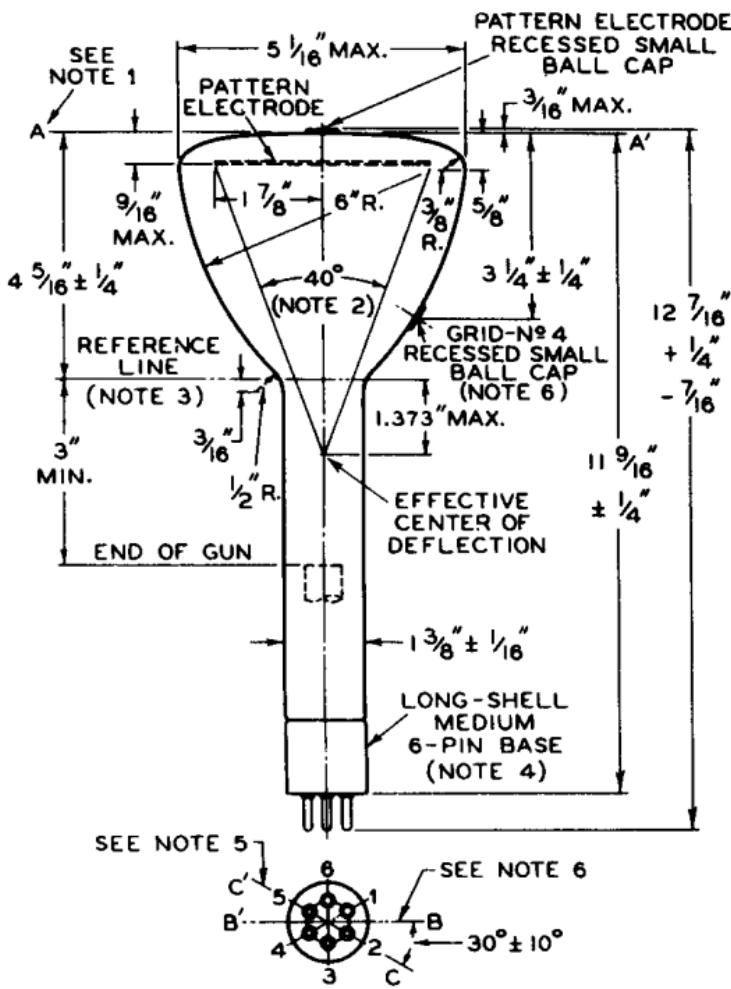

92CM-6653

NOTE 1: LINE AA' IS PERPENDICULAR TO THE AXIS OF THE TUBE AND INTERSECTS THE FACE CONTOUR $1/2"$ FROM THE AXIS OF THE TUBE.

NOTE 2: DEFLECTION ANGLE BETWEEN DIAGONALLY OPPOSITE CORNERS OF PATTERN.

NOTE 3: REFERENCE LINE IS DETERMINED BY POSITION WHERE GAUGE $1.438" \pm .003$ I.D. AND $2"$ LONG WILL REST ON BULB CONE.

NOTE 4: $\frac{1}{2}$ OF BULB WILL NOT DEVIATE MORE THAN 2° IN ANY DIRECTION FROM THE PERPENDICULAR ERECTED AT THE CENTER OF THE BOTTOM OF THE BASE.

NOTE 5: MINOR AXIS OF PATTERN ELECTRODE MAY VARY FROM PLANE CC' THROUGH PIN 2 AND TUBE AXIS BY 10° . TOP EDGE OF PATTERN IS ON SAME SIDE OF TUBE AS PIN 5.

NOTE 6: BB' INDICATES PLANE THROUGH TUBE AXIS AND GRID-NO.4 TERMINAL.